

# DXN 200

**Scotsman**  
Ice Systems

Ice Machine/Dispenser up to 110 kg

Item #:

Project:

Quantity:



## FEATURES

- Compact ice or ice & water automatic dispenser, with appealing, contemporary "touch-screen" design.
- Ideal for free-refill self-service concepts with up to 2400 glasses filled per day and capable of dispensing ice for up to 200 customers in queue at one time.
- Available either touch-free or button activated.
- Possible to set ice only or ice & water on site and desired ice dosage (from 1' to 15' or continuous).
- Fast & friendly cleaning mode for the end user.
- Algorithm signaling when reservoir is temporarily empty.
- Full frontal visibility of settings and errors for preventative service check-up.
- Accessory: on request, it can be installed upon a specifically designed cabinet.



DXN 200  
Cubelet 1 g  
W 16 x D 15 x H 7-8 mm

## CONDENSING SYSTEM

Air cooled

## INTERNAL BIN CAPACITY

10 kg

## REFRIGERANT GAS

R452A

## OPERATING REQUIREMENTS

|                    | Minimum        | Maximum        |
|--------------------|----------------|----------------|
| Air temperature    | 10°C           | 38°C           |
| Water temperature  | 5°C            | 38°C           |
| Water pressure     | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10%           | +10%           |

Certifications:



**IMPORTANT NOTICE:**  
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice  
Apple store  
Google play  
Windows store

DOWNLOAD

[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Ice Machine/Dispenser up to 110 kg


# DXN 200

Ice Machine/Dispenser up to 110 kg

Item #:

Project:

Quantity:

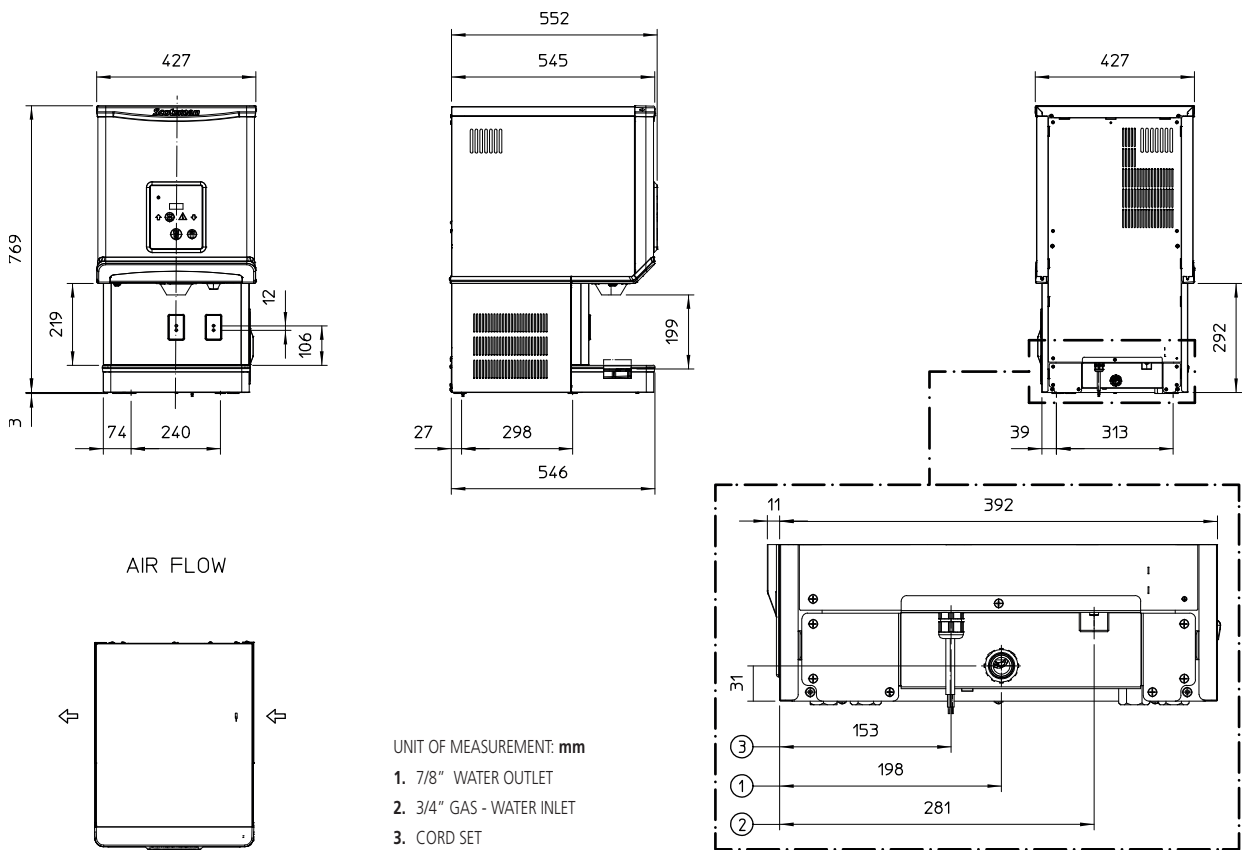

| UNIT DATA          |                    |          |                        |           | Compressor |              | Circuit wires |        | Max. fuse size |  |  |
|--------------------|--------------------|----------|------------------------|-----------|------------|--------------|---------------|--------|----------------|--|--|
|                    |                    |          | Version                | Voltage   | Btu/h      | W            | No.           | Ømm²   | A              |  |  |
|                    |                    |          | DXN 200 AS             | 230/50/1  | 4436       | 1300         | 3             | 1.5    | 10             |  |  |
| Size (W x D x H)   | 427 x 544 x 772 mm |          |                        |           |            |              |               |        |                |  |  |
| Net weight         | 53 kg              |          |                        |           |            |              |               |        |                |  |  |
|                    |                    |          |                        |           |            |              |               |        |                |  |  |
| SHIPPING DATA      |                    |          |                        |           |            |              |               |        |                |  |  |
|                    |                    |          |                        |           |            |              |               |        |                |  |  |
|                    |                    |          |                        |           |            |              |               |        |                |  |  |
| Carton (W x D x H) | 490 x 610 x 940 mm |          |                        |           |            |              |               |        |                |  |  |
| Weight             | 61 kg              |          |                        |           |            |              |               |        |                |  |  |
|                    |                    |          | 24 h ice production kg |           |            | Energy       |               | Water  | Instant        |  |  |
|                    |                    |          | °C Amb. / °C Water     |           |            | consumption* |               | usage* | power          |  |  |
| Version            | Condensation       | Voltage  | 10°C/10°C              | 21°C/10°C | 32°C/21°C  | kWh/100 kg   | kWh/24h       | l/h    | W              |  |  |
| DXN 200 AS         | Air                | 230/50/1 | 110                    | 92        | 65         | 23.1         | 15.0          | 2.7    | 670            |  |  |

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions