

EC 106 EASY FIT

Scotsman
Ice Systems

Self Contained Ice Machine up to 50 kg

Item #:

Project:

Quantity:



FEATURES

- Produces individual Gourmet crystal clear supercubes.
- Resistant stainless steel exterior.
- Simple and reliable electromechanic controls.
- Front panel in & out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only).
- Easily accessible front ON-OFF Switch.
- Routine Maintenance visible alarm light on front panel.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.



EC L 106
Large Gourmet 39 g
Ø 38 x H 41 mm



EC M 106
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

23 kg

REFRIGERANT GAS

R134a

OPERATING REQUIREMENTS

VOLTAGE V/Hz/ph

230/50/1
230/60/1

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine up to 50 kg





EC 106 EASY FIT

Self Contained Ice Machine up to 50 kg

Item #:

Project:


Quantity:

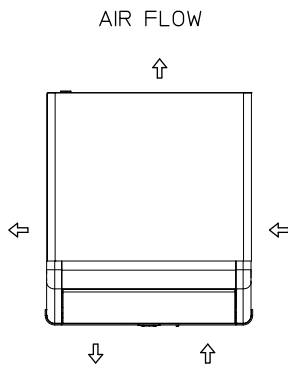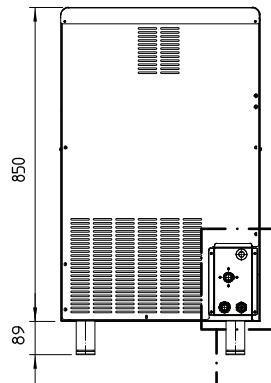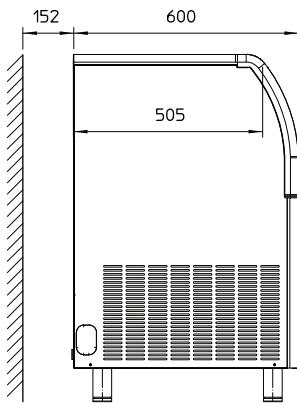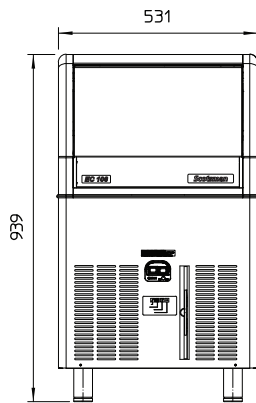

AIR FLOW

UNIT OF MEASUREMENT: mm

1. 25/32" OD - OVERFLOW DRAIN
2. 3/4" GAS - WATER INLET
3. 3/4" GAS - WATER OUTLET
WATER COOLED UNIT ONLY
4. 3/4" GAS - WATER INLET
WATER COOLED UNIT ONLY
5. CORD SET



UNIT DATA					Compressor		Circuit wires		Max. fuse size		
			Version	Voltage	Btu/h	W	No.	Ømm²	A		
			Size (W x D x H)	531 x 600 x 930 mm	EC L 106 AS	230/50/1	4095	1200	3	1.5	10
			Net weight	49 kg	EC M 106 AS	230/50/1	4436	1300	3	1.5	10
					EC M 106 WS	230/50/1	4436	1300	3	1.5	10
SHIPPING DATA			EC M 106 AS	230/60/1	5221	1530	3	1.5	10		
Carton (W x D x H)	600 x 670 x 950 mm										
Weight	56 kg										
			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power		
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W		
EC L 106 AS	Air	230/50/1	50	48	38	26.7	10.9	4.2	550		
EC M 106 AS	Air	230/50/1	50	48	38	26.8	10.2	6.0	580		
EC M 106 WS	Water	230/50/1	50	48	41	24.4	10.0	53.3	580		
EC M 106 AS	Air	230/60/1	50	48	38	33.7	12.8	5.8	700		

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions