

# NW 608



**Scotsman**  
Ice Systems

## Modular Ice Machine up to 320 kg

Item #:

Project:

Quantity:



### FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!



NW 608  
Full Cube 12 g  
W 26,5 x D 26,5 x H 26 mm



NW H 608  
Half Cube 6 g  
W 13 x D 26,5 x H 26 mm

### CONDENSING SYSTEM

Air cooled

### REFRIGERANT GAS

R404A

### VOLTAGE V/Hz/ph

230/50/1

### RECOMMENDED BINS

| Head   | Bins       |       | kg  |
|--------|------------|-------|-----|
| NW 608 | ✓          | SB393 | 181 |
|        | ✓          | SB530 | 243 |
|        | CBT48EAMCD | SB948 | 406 |

### LEGEND:

- ✓ : Perfect combination between ice maker and bin  
 ● : Ice chute cut-out performed upon installation  
 CBTxxxxxxx : need additional bin top

Certifications:



### OPERATING REQUIREMENTS

|                    | Minimum        | Maximum        |
|--------------------|----------------|----------------|
| Air temperature    | 10°C           | 43°C           |
| Water temperature  | 5°C            | 38°C           |
| Water pressure     | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10%           | +10%           |

**IMPORTANT NOTICE:**  
 Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**  
 Apple store  
 Google play  
 Windows store



[www.scotsman-ice.it](http://www.scotsman-ice.it)  
[www.scotsman-ice.com](http://www.scotsman-ice.com)

Modular Ice Machine up to 320 kg

# NW 608




## Modular Ice Machine up to 320 kg

Item #:

Project:

Quantity:

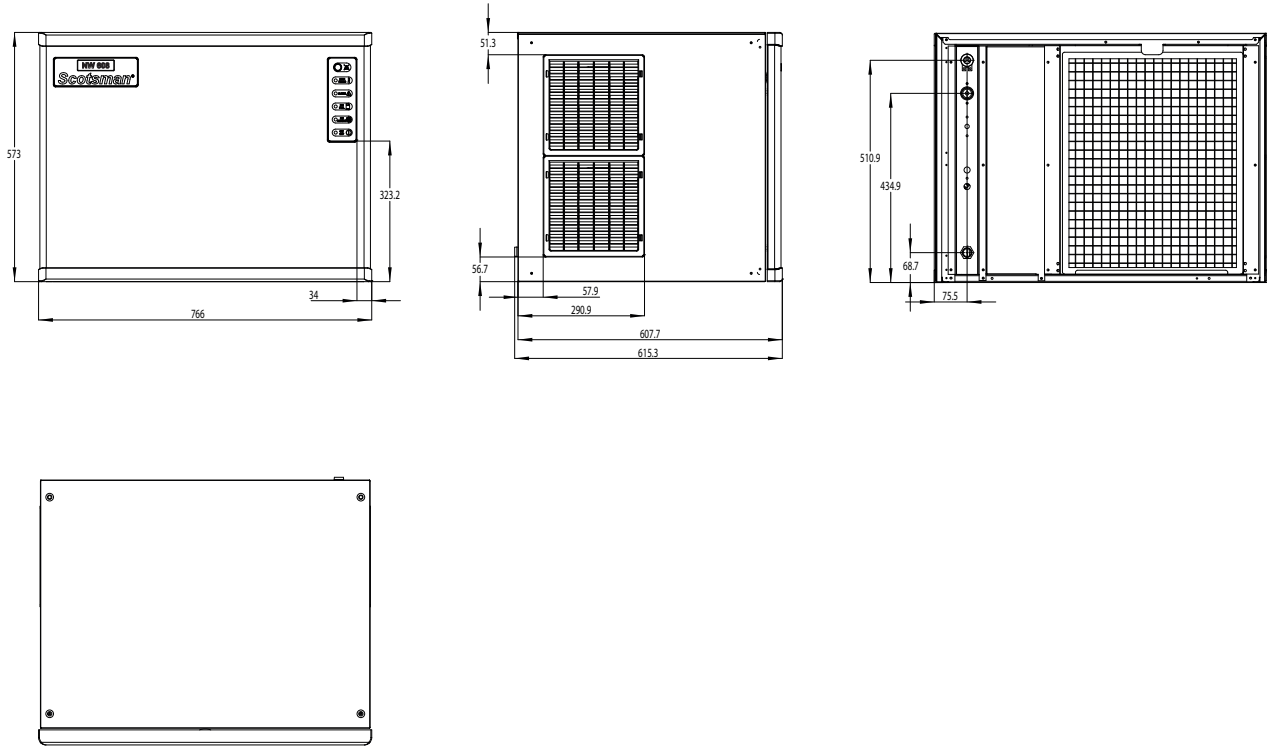

UNIT OF MEASUREMENT: mm

### UNIT DATA

Size (W x D x H) 760 x 620 x 575 mm

Net weight 78 kg

### SHIPPING DATA

Carton (W x D x H) 830 x 690 x 770 mm

Weight 92 kg

|             |          |  | Compressor |      | Circuit wires |      | Max. fuse size |
|-------------|----------|--|------------|------|---------------|------|----------------|
| Version     | Voltage  |  | Btu/h      | W    | No.           | Ømm² | A              |
| NW L 608 AS | 230/50/1 |  | 16549      | 4850 | 3             | 1.5  | 16             |
| NW H 608 AS | 230/50/1 |  | 16549      | 4850 | 3             | 1.5  | 16             |

|             |              |          | 24 h ice production kg<br>°C Amb. / °C Water |           |           | Energy<br>consumption* |         | Water usage* | Instant<br>power |
|-------------|--------------|----------|----------------------------------------------|-----------|-----------|------------------------|---------|--------------|------------------|
| Version     | Condensation | Voltage  | 10°C/10°C                                    | 21°C/10°C | 32°C/21°C | kWh/100 kg             | kWh/24h | l/h          | W                |
| NW L 608 AS | Air          | 230/50/1 | 320                                          | 280       | 210       | 16.3                   | 36.6    | 16.9         | 1600             |
| NW H 608 AS | Air          | 230/50/1 | 320                                          | 280       | 210       | 16.3                   | 36.6    | 16.9         | 1600             |

(\*) Data refer to 32°C Amb. / 21°C Water temperature conditions